

## Easidew PRO I.S. Intrinsically Safe Moisture Transmitter

The Easidew PRO I.S. transmitter is a reliable and accurate 2-wire dew-point transmitter for trace moisture measurement in a wide range of gas and liquid process applications. Tough and durable, with global certifications and approvals, it is suitable for natural gas, petrochemical, and refinery applications.



### Highlights

- Measurement range -110...+20 °Cdp (-166...+68 °Fdp)
- ATEX, IECEx, UKCA, cQPSUs, TR CU Ex certified
- Accuracy  $\pm 1$  °Cdp ( $\pm 1.8$  °Fdp)
- 2-wire 4...20 mA output
- Traceable 13-point calibration certificate
- 450 barg (6526.7 psig) pressure rating
- Alternative process connections available
- Material certification to BS EN 10204 3.1
- Moisture in gases and liquids
- Service exchange program
- Oxygen Service cleaned

### Applications

- Natural gas production and processing
- Pipeline drying
- Fiscal metering of gas
- LNG production processing and receiving terminals
- Petrochemical process liquids
- Catalyst protection
- Polymer production
- CNG drying
- Metallurgical furnace blanket gas
- Compressed air in hazardous areas

[www.michell.com](http://www.michell.com)

**MICHELL**  
Instruments  
A PST BRAND

GET UP TO 30% DISCOUNT + AN EXTRA 10% CASH VOUCHER

**QUOTATION**

SALES@MIIGO.ONLINE

||

+91-9398693085

**Dew-Point Transmitters**



**Easidew PRO I.S.**

**The Durable Intrinsically Safe Dew-Point Transmitter**

The Easidew PRO I.S. is designed to measure moisture in demanding process and refinery applications in either gases or liquids. The transmitter offers a wide measurement range of -110 to +20 °Cdp (-166...+68 °Fdp), is easily integrated into existing systems and has global certifications for use in hazardous areas.

The unit's robust housing protects the electronics from harsh environmental conditions. Based on Michell's ceramic metal-oxide moisture technology, the Easidew PRO I.S. gives long-term stability and a fast response to changes in moisture.

With high-volume manufacturing capacity, the Easidew PRO I.S. is suitable for use by OEMs and systems integrators, who require short and consistent lead times.

**Ease of Installation**

With an industry standard process connection, the Easidew PRO I.S. is quick to install and easy to maintain.

**Installation features:**

- 5/8" process connection and G1/2", 3/4" UNF adaptors
- Electrical connection via M20 gland
- 316 stainless steel transmitter sample block (optional)
- Transmitter mounting bracket (optional)

**Global Certifications**

The Easidew PRO I.S. dew-point transmitter has global hazardous area certification and traceable calibration to national standards.

**Hazardous area approvals:**

- IECEX
- UKCA
- TR CU Ex
- ATEX
- cQPSus (US & Canada)
- CRN

**Calibration approval:**

- UKAS
- NIST

Optional cleaning for enriched oxygen service

**Moisture in Gases or Liquids**

The Easidew PRO I.S. is configurable for measuring moisture in both gases and hydrocarbon liquids.

**Moisture in gases**

The signal from the dew-point transmitter can be scaled to parts per million by volume (ppm<sub>v</sub>) in gases in hazardous area applications.

Measurement in ppm<sub>v</sub> requires a fixed pressure input of up to 40 MPa which has to be programmed into the

transmitter to accurately compensate gas stream pressure (if different than atmospheric) to determine the true ppm<sub>v</sub> of water vapor in the measurement gas.

Factory programmed standard setting is: 0...3000 ppm<sub>v</sub>

**Moisture in liquids**

The signal from the dew-point transmitter can be scaled to parts per million by weight (ppm<sub>w</sub>) in liquids in hazardous area applications.

Measurement in ppm<sub>w</sub> requires 6-point saturation constants of the liquid at various temperatures, these need to be programmed into the transmitter to determine precise ppm<sub>w</sub> of water vapor in the measurement liquid.

0...1000 ppm<sub>w</sub> capability – factory configured to customer-required range and application.

**Factory programmed common liquids:**

- Butane
- Methane
- 1-Butene
- Ethylene
- Isobutane
- Propane
- Propylene
- Pentane
- Ethane
- Cyclopentane

**Flexible Configuration**

The Easidew PRO I.S. can be programmed to the following standard settings:

- Dew-point range: -110...+20 °Cdp (-166...+68 °Fdp) or -100...+20 °Cdp (-148...+68 °Fdp)
- Moisture content: 0–3000 ppm<sub>v</sub> or 0–1000 ppm<sub>w</sub>
- Pressure: 0...400 barg (0...5801.5 psig)
- Temperature: °C or °F
- Saturation constant value (factory programmed common liquids as above)

Non-standard settings are also available and may be requested at the time of order or alternatively, modified by using the Easidew PRO I.S. communication kit and software (see order codes).

**Speed of Supply**

The transmitter is manufactured within Michell's world-leading high-volume moisture transmitter manufacturing center in the United Kingdom, which ensures reliability and repeatability of delivery and field supported by a network of Michell's global service centers.

- Calibration manufacturing system is traceable to NPL and NIST standards

**System Customization**

If your application requires a customized sensor solution, we have a specialized design and manufacturing facility to cover your requirements.



[www.michell.com](http://www.michell.com)

**GET UP TO 30% DISCOUNT + AN EXTRA 10% CASH VOUCHER**

**QUOTATION**

**SALES@MIIGO.ONLINE**

**||**

**+91-9398693085**

Dew-Point Transmitters

Technical Specifications

Product	Easidew PRO I.S. for Gases	Easidew PRO LQ I.S. for Liquids
<b>Performance Specifications</b>		
Measurement range	-110...+20 °C (-166...+68 °F) dew point -100...+20 °C (-148...+68 °F) dew point	0...1000 ppm <sub>w</sub> capability – factory configured to customer-required range and application
Accuracy	±1 °C (±1.8 °F) dew point (+20...-60 °C / +68...-76 °F) ±2 °C (±3.6 °F) dew point (-60...-110 °C / -76...-166 °F)	
Response time	5 mins to T95 (dry to wet)	
Repeatability	0.5 °C (0.9 °F) dew point	
Calibration	Traceable 13-point calibration and certificate	
<b>Electrical Specifications</b>		
Output signal	4...20 mA (2-wire connection, current source); User configurable over range	
Output	Dew point or moisture content	Moisture content
Analog output scaled range	<b>Dew point:</b> -110...+20 °C (-166...+68 °F) or -100...+20 °C (-148...+68 °F) <b>Moisture content in gas:</b> 0...3000 ppm <sub>v</sub> <b>Non-standard:</b> mg/m <sup>3</sup> , lbs/MMSCF natural gas	<b>Moisture content in liquid:</b> 0...1000 ppm <sub>w</sub> capability – factory configured to customer-required range and application
Supply voltage	12–28 V DC	
Load resistance	Max 250 Ω @ 12 V (500 Ω @ 24 V)	
Current consumption	23 mA max, depending on output signal	
Saturation constants (for moisture in liquids measurements only)	6-point look-up table for saturation constants up to 1000 ppm <sub>w</sub> over the temperature range 0...+50 °C (32...+122 °F); saturation constants for 10 common liquids can be programmed into the Easidew PRO LQ I.S. via the application software; alternatively the user can program saturation constants manually	
Compliances	CE & UKCA	
<b>Operating Specifications</b>		
Operating temperature	-40...+60 °C (-40...+140 °F)	
Compensated Temperature Range	-20...+50 °C (-4...+122 °F) NOTE: The transmitter accuracy statement is only valid for the temperature range: -20/+50 °C (-4/+122 °F)	
Storage Temperature	-40...+60 °C (-40...+140 °F)	
Operating pressure	45 MPa (450 barg / 6526.7 psig) maximum	
Flow rate	1...5 Nl/min mounted in standard sampling block 0...10 m/sec direct insertion	0.1...0.3L/min through Easidew sample block 0.1...1m/s direct insertion
<b>Mechanical Specifications</b>		
Ingress protection	IP66 in accordance with standard BS EN 60529:1992; NEMA 4 protection in accordance with standard NEMA 250-2003	
Intrinsically safe area certificates *	<b>ATEX/UKCA:</b> II 1 G Ex ia IIC T4 Ga (-20 °C...+70 °C) <b>IECEx:</b> Ex ia IIC T4 Ga (-20 °C...+70 °C) <b>TR CU:</b> 0Ex ia IIC T4 Ga (-20 °C...+70 °C) <b>cQPSus:</b> IS, Class I, Division 1, Groups A, B, C & D, T4 Class I, Zone 0, AEx ia IIC T4 Ga, Ex ia IIC T4 Ga Tamb +70 °C	
Russian pattern approval	Russia (GOST-R), Kazakhstan (GOST-K)	
Canadian pressure vessel cert	C.R.N. – 11 Canadian provinces	
Oxygen service	<b>Optional:</b> cleaned for enriched oxygen	
Housing material	316 stainless steel	
Filter (sensor protection)	<b>Standard:</b> Stainless steel sintered guard (for protection against fine particulate >80µm) <b>Optional:</b> HDPE guard (for protection against fine particulate >10µm)	
Process connection and material	316 stainless steel 5/8" – 18 UNF with bonded seal, G1/2" and 3/4" UNF adaptors available (material certificate to BS EN 10204 3.1 – see 'accessories and spare parts' on product order codes)	
Weight	1.27 kg (2.8 lb)	
Electrical connections	Screw terminal via female M20 x 1.5mm gland	
Diagnostic conditions (factory programmed)	<b>Condition</b> Sensor fault Under-range dew point Over-range dew point	<b>Output</b> 23 mA 4 mA 20 mA
Approved galvanic isolators	KFD2-CR-EX1.20200 KFD0-CS-EX2.50P KFD2-CR-EX1.30200 KFD2-STC4-EX1.H	MTL5040 MTL5541 KFD0-CS-EX1.50P MTL5041

\* The end user has a responsibility to ensure that when installed in the Hazardous Area, the system is compliant with relevant local and international installation Standards for the use of equipment in explosive atmospheres.

[www.michell.com](http://www.michell.com)



GET UP TO 30% DISCOUNT + AN EXTRA 10% CASH VOUCHER

**QUOTATION**

SALES@MIIGO.ONLINE

||


+91-9398693085

Dew-Point Transmitters


# Easidew PRO I.S.

## Product Dimensions


Easidew PRO I.S.

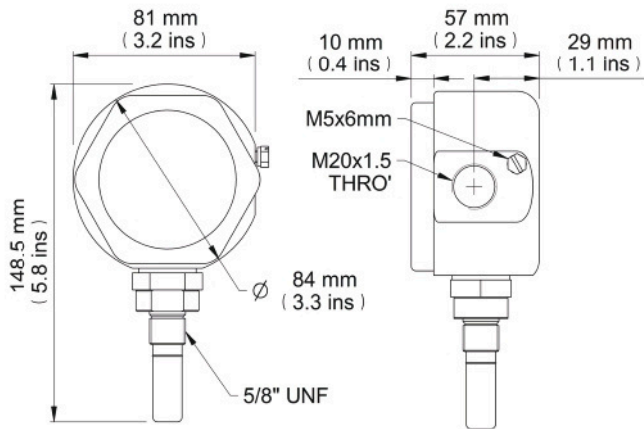


Easidew PRO I.S. with wall mounting bracket

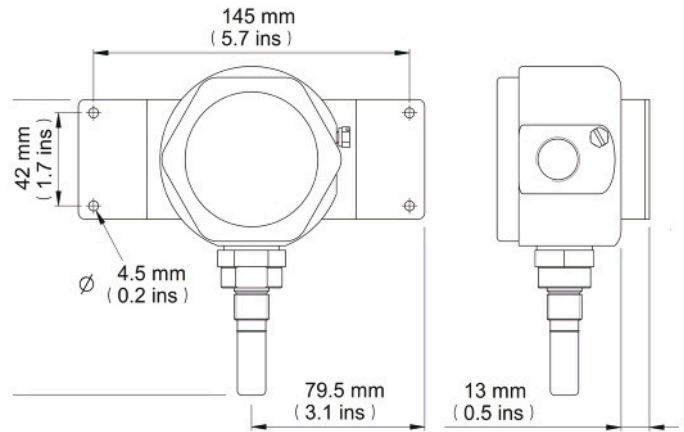

Optional Sample Block

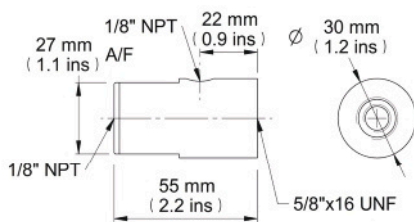

Bonded Seal



## Related Process Products



**Easidew PRO XP**  
Explosion-Proof  
Moisture Transmitter




**MDM300 I.S. Portable**  
Dew-Point Hygrometer



**Minox i**  
Intrinsicly Safe Oxygen  
Transmitter



**QMA601**  
Process Moisture Analyzer



**ES70**  
Sampling System



**TDL600**  
Process Moisture Analyzer



**Promet EExd**  
Process Moisture Analyzer



**XTP601**  
Oxygen Analyzer

Michell Instruments adopts a continuous development programme which sometimes necessitates specification changes without notice.  
Issue no: Easidew PRO IS\_97208\_V10.5\_EN\_1122



[www.ProcessSensing.com](http://www.ProcessSensing.com)

© 2022 Michell Instruments

**GET UP TO 30% DISCOUNT + AN EXTRA 10% CASH VOUCHER**

**QUOTATION**

SALES@MIIGO.ONLINE

||

+91-9398693085