

E+E

—
your partner
in sensor
technology.

+ Datasheet EE371

Compact Dew Point Sensor



www.epluse.com

GET UP TO 30% DISCOUNT + AN EXTRA 10% CASH VOUCHER

QUOTATION

SALES@MIIGO.ONLINE

||

+91-9398693085

EE371

Compact Dew Point Sensor

The EE371 is dedicated for accurate and reliable monitoring of the dew point temperature (Td) in the range -60...+60 °C Td (-76...140 °F Td), with pressure rating up to 100 bar (1 450 psi). It is ideal for compressed air systems and industrial process control. Besides Td, the device measures also frost point temperature (Tf) or volume concentration (Wv).

High Accuracy

The innovative, monolithic E+E HMC200 humidity and temperature sensing element together with a sophisticated auto-calibration procedure leads to an accuracy better than ±2°C Td (±3.6 °F Td) and excellent long term stability.

Analog Outputs and Display

The measured data is available on two freely configurable voltage or current outputs as well as on the LCD display.

Functional Design

The compact, robust metal enclosure, the swirling front-end and various process connections and sampling options allow for easy and comfortable design-in, mounting and operation.

Easy Configuration

An optional adapter and the free EE-PCS Product Configuration Software facilitate easy configuration and adjustment of the EE371.



EE371 compact dew point sensor



EE371 compact dew point sensor with sampling cell (optional)

Features

Measurement performance

- Dew point / frost point temperature, Volume concentration
- Measuring range -60...+60 °C Td (-76...+140 °F Td)
- Accuracy of measurement ±2 °C Td (±3.6 °F Td)
- Auto-calibration

Status LEDs

Outputs

- Two voltage or current outputs
- Industrial connector
DIN VDE 0627 / IEC 61984

Configurable and adjustable

- Service interface
- Free EE-PCS
Product Configuration Software

Enclosure

- IP65 protection rating
- AlSi9Cu3 (Aluminium die-cast)
- Swirling front end

Process connection

- Stainless steel
- G 1/2" ISO or 1/2" NPT
- Pressure rating 20 bar (290 psi)
or 100 bar (1 450 psi)

Inspection certificate

According to DIN EN 10204-3.1

www.epluse.com

v1.12 / All rights reserved | 3


GET UP TO 30% DISCOUNT + AN EXTRA 10% CASH VOUCHER

QUOTATION SALES@MIIGO.ONLINE || +91-9398693085

Dimensions


Values in mm (inch)

Enclosure

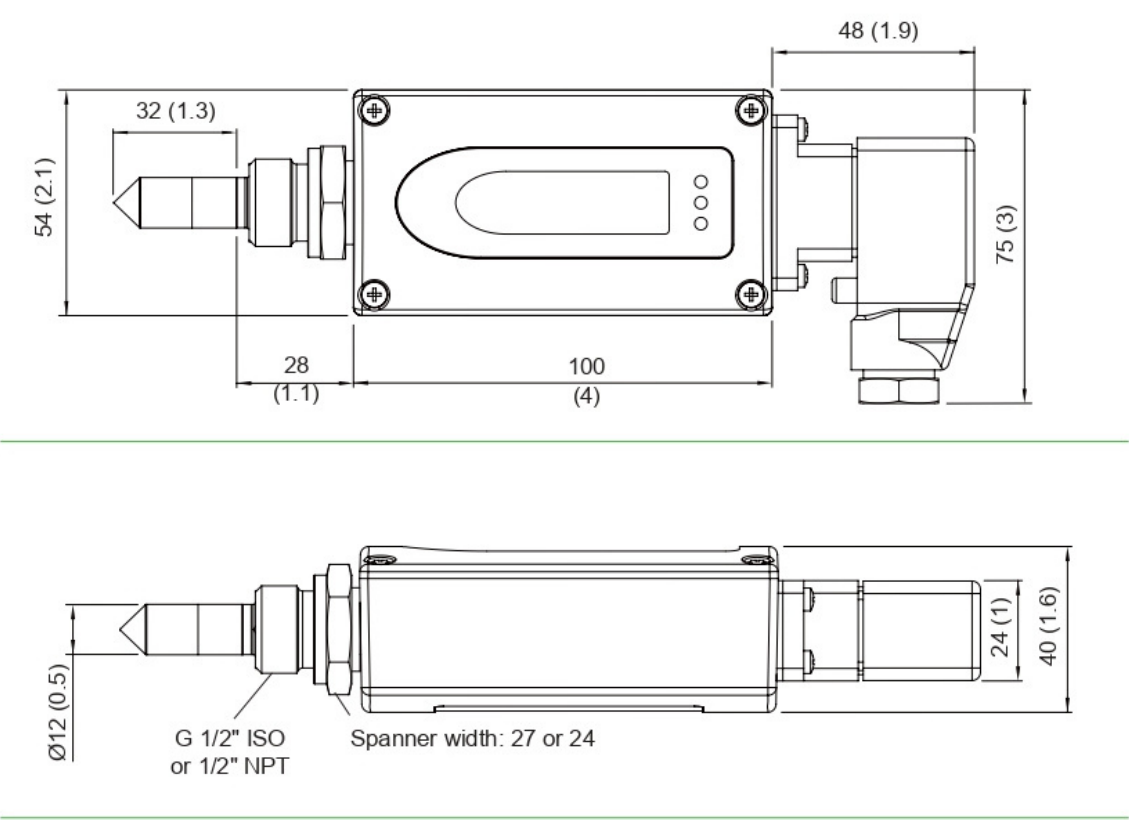

Technical Data

Measurands

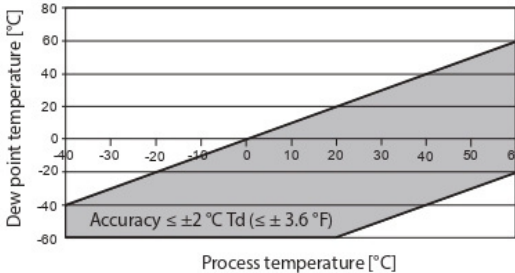Dew Point Temperature (Td)	
Measuring range	-60...+60 °C Td (-76...+140 °F Td)
Accuracy ¹⁾	
Response time t ₉₀	<5 min for step -5 °C Td (+23 °F Td) → -50 °C Td (-58 °F Td) <20 s for step -50 °C Td (-58 °F Td) → -5 °C Td (-23 °F Td)

1) Traceable to intern. standards, administrated by NIST, PTB, BEV,...
The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation). The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

Technical Data

Measurands

Volume Concentration (Wv)	
Measuring range @ 1 013 mbar (14.7 psi)	20...200 000 ppm
Accuracy @ 20 °C (68 °F) and 1 013 mbar (14.7 psi)	±(5 ppm + 9 % from measured value)

Outputs

Analogue			
Two freely selectable and scaleable outputs ¹⁾ Td, Tf or Wv	0 - 10 V 4 - 20 mA (3-wire)	0 mA < I _L < 1 mA R _L < 500 Ω ¹⁾	I _L = load current R _L = load resistance

1) Traceable to intern. standards, administrated by NIST, PTB, BEV,...
The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation). The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

General

Power supply class III  USA & Canada: Class 2 supply necessary, max. voltage 30 V DC	15 - 30 V DC		
Current consumption , typ. @ 24 V DC	Voltage output Current output	40 mA / during auto-calibration: 100 mA 80 mA / during auto-calibration: 140 mA	
Electrical connection 7-pole industrial plug wire cross-section cable outlet	DIN VDE 0627 / IEC 61984 0.25 - 1 mm ² PG 11		
Filter	Stainless steel sintered		
Pressure working range	0...20 bar (0...290 psi) 0...100 bar (0...1450 psi)		
Temperature working range	Medium (air) Electronics Display	-40...+70 °C (-40...+158 °F) -40...+60 °C (-40...+140 °F) -20...+50 °C (-4...+122 °F)	
Storage condition	-40...+60 °C (-40...+140 °F)		
Enclosure Material Protection rating	Aluminium die-cast (AlSi9Cu3) IP65		
Electromagnetic compatibility	EN 61326-1 FCC Part15 Class B	EN 61326-2-3 ICES-003 Class B	Industrial environment
Conformity	 		
Configuration and adjustment	EE-PCS Product Configuration Software (free download: www.epluse.com/configurator) and configuration adapter		

Sampling Cells

Basic Sampling Cell

The basic sampling cell is suitable for the pressure range 0...64 bar (0...928 psi). It allows for easy installation of the dew point sensor into an existing or self-constructed sampling system.



HA050103 ISO / HA050105 NPT

Number	HA050103 ISO	HA050105 NPT
1	G 1/2"	1/2"
2	G 1/4"	1/4"
3	G 1/4"	1/4"

Sampling Cell with Quick Connector and Bleed Screw

The sampling cell is optimized for the pressure range 0...10 bar (0...145 psi). The air flow can be adjusted with the bleed screw. The G 1/2" ISO version features a quick connector suitable for standard DN 7.2 connection, which allows for the sampling cell to be mounted and removed without process interruption.



HA050102 ISO

Number	HA050102 ISO
1	G 1/2"
2	Bleed screw
3	Quick connection



HA050107 NPT

Number	HA050107 NPT
1	1/2"
2	Bleed screw
3	1/4"

Sampling Cell for Atmospheric Dew Point

The sampling cell is optimized for measuring the atmospheric dew point temperature of compressed air with pressure range 0...10 bar (0...145 psi). It features a quick connector suitable for standard DN7.2 air connection, which allows for the sampling cell to be mounted and removed without process interruption. The pressure in the sampling cell can be adjusted via the needle valve.



HA050106 ISO

Number	HA050106 ISO
1	G 1/2"
2	Quick connection

Ordering Guide

Feature	Description	Code
Hardw. Conf.		EE371-
	Process connection	G 1/2" ISO thread 1/2" NPT thread
	Pressure rating	20 bar (290 psi) 100 bar (1450 psi)
	Display	Display with backlight
		D2
Software Setup - Outputs	Output 1 measurand	Dew point temperature Td [°C] Dew point temperature Td [°F] Frost point temperature Tf [°C] (for Td > 0 °C output is Td) Frost point temperature Tf [°F] (for Td > 32 °F output is Td) Volume concentration Wv [ppm]
	Output signal 1	0 - 10 V 4 - 20 mA
	Output 1 scaling low	-80 Value
	Output 1 scaling high	20 Value
	Output 2 measurand	Dew point temperature Td [°C] Dew point temperature Td [°F] Frost point temperature Tf [°C] (for Td > 0 °C output is Td) Frost point temperature Tf [°F] (for Td > 32 °F output is Td) Volume concentration Wv [ppm]
	Output signal 2 ¹⁾	0 - 10 V 4 - 20 mA
	Output 2 scaling low	-80 Value
	Output 2 scaling high	20 Value
		No code MA53 MA65 MA66 MA75 GA3 GA6 No code SALValue SAHValue MB52 MB53 No code MB66 MB75 GB3 GB6 No code SBLValue No code SBHValue

1) Output signal 1 and 2 must be equal

Order Example

EE371-PA2PN20D2GA3SAL-40SAH60GB3SBL-40SBH60

Feature	Code	Description
Process connection	PA2	1/2" NPT thread
Pressure rating	PN20	20 bar (290 psi)
Display	D2	Display with backligh
Output 1 measurand	MA53	Dew point temperature Td [°C]
Output signal 1	GA3	0 - 10 V
Output 1 scaling low	No code	-80
Output 1 scaling high	No code	60
Output 2 measurand	No Code	Frost point temperature Td [°F]
Output signal 2	GB3	0 - 10 V
Output 2 scaling low	No code	-80
Output 2 scaling high	SBH60	60

Accessories

For further information see datasheet [Accessories](#).

Description	Code
Product Configuration Software (free download: www.epluse.com/configurator)	EE-PCS
Product Configuration Adapter (available at www.epluse.com/ee371)	EE-PCA
Sampling cell G 1/2" with quick connector	HA050102
Sampling cell NPT with bleed screw	HA050107
Sampling cell G 1/2" for atmospheric dew point	HA050106
Basic sampling cell G 1/2"	HA050103
Basic sampling cell NPT	HA050105

Company Headquarters &
Production Site

E+E Elektronik Ges.m.b.H.
Langwiesen 7
4209 Engerwitzdorf | Austria
T +43 7235 605-0
F +43 7235 605-8
info@epluse.com
www.epluse.com

Subsidiaries

E+E Sensor Technology (Shanghai) Co., Ltd.
T +86 21 6117 6129
info@epluse.cn

E+E Elektronik France SARL
T +33 4 74 72 35 82
info.fr@epluse.com

E+E Elektronik Deutschland GmbH
T +49 6171 69411-0
info.de@epluse.com

E+E Elektronik India Private Limited
T +91 990 440 5400
info.in@epluse.com

E+E Elektronik Italia S.r.l.
T +39 02 2707 86 36
info.it@epluse.com

E+E Elektronik Korea Ltd.
T +82 31 732 6050
info.kr@epluse.com

E+E Elektronik Corporation
T +1 847 490 0520
info.us@epluse.com



—
your partner
in sensor
technology.

datasheet_EE371 | Version v1.12 | 08-2024
© Copyright E+E Elektronik Ges.m.b.H. | All rights reserved

www.epluse.com

GET UP TO 30% DISCOUNT + AN EXTRA 10% CASH VOUCHER

QUOTATION SALES@MIIGO.ONLINE || +91-9398693085